

Rezistente electrice plate

Tip/Type BK225

Aplicatii:

Incalzirea utilajelor si matritelor in industria prelucrarii maselor plastice si aplicatii similare.

Constructie:

Sarma rezistenta in izolatia speciala de nica, incastrat in tabla de aliaj de nichelina si otel cu placa contact de presiune cu grosimea de 5 mm.


Modele:

Pentru fixarea rezistentei, pot fi realizate gauri la cerere. Sunt disponibile cu gauri, cu piese de fixare pentru termocuple si cu decupari cu conditia ca dimensiunile sa permita.

- Conectarea alimentarii cu prize, cutie de borne sau cabluri montate.
- Deasemenea disponibile cu placi de alama conductoare de caldura.

Important:

Va rugam sa retineti observatiile referitoare la asamblare, care sunt prezentate pe pagina 1.22.

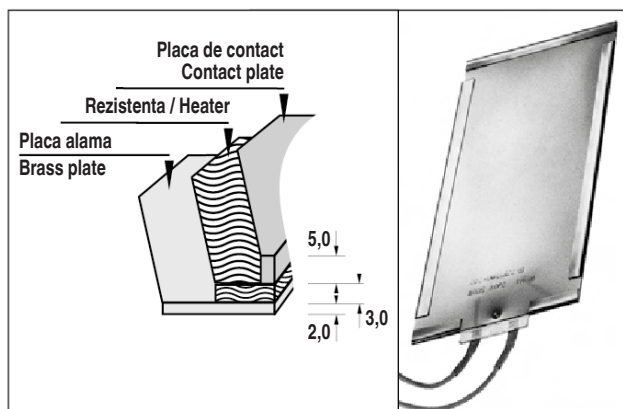

Flat Heaters

Application:

Heating of tools and moulds in the plastic processing industry and similar applications.

Construction:

Resistance wire in special mica insulation, encased in nickel alloy steel sheet, optionally with contact pressure plate 5mm thick.




Models:

For fastening the heater, matching holes can be provided. Available with bore holes, thermocouple bridges and cut-outs provided that the measurements permit.

- Power connection via plug socket or terminal box or by a securely mounted cable.
- Available also with brass heat conducting plate.

Important:

Please note the remarks concerning assembly, which are given on page 1.22.

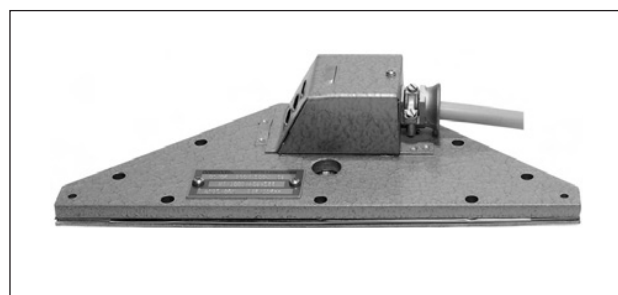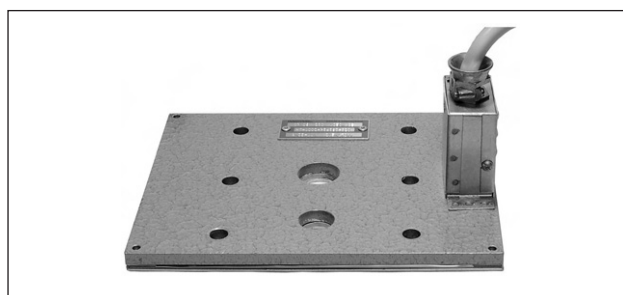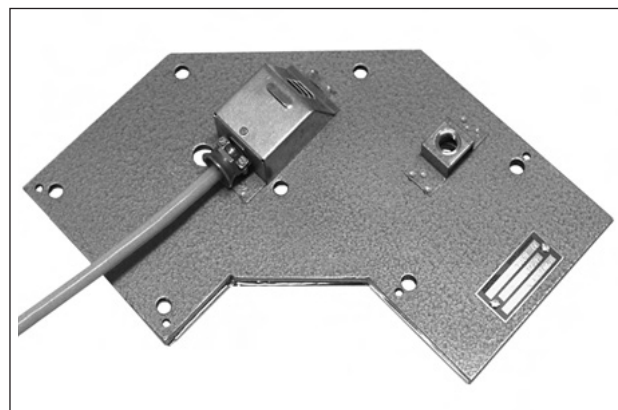

Nr. / No.	BK225	
Alimentarea: Main supply:	la cerere as required	
max T: max T:	°C	350
Densitatea de putere: Heating - power:	W/cm ²	max.: 3,5