

**Rezistente tubulare flexibile,
□ (patrat)**
LA CEREREA CLIENTULUI
**Flexible Tubular Heater,
□ (square)**
CUSTOM MADE


Formular comanda		Order form	
Firma/Company _____			
Persoana contact/Contact _____			
Tel.: _____	Fax: _____	Data/Date: _____	
<input type="checkbox"/> Comanda/Order	Nr./No.: _____	<input type="checkbox"/> Cerere oferta/Quotation	

Specificatii comanda:

- n:** Cantitatea
Nr.: **S5156**, □ (patrat)
- A:** Sectiunea transversala a rezistentei tubulare
(□6 / □8 mm)
- L:** Lungimea rezistentei tubulare
(**max. 2600 mm**)
- LU1:** Lungime neincalzita (30 mm)
LU2: Lungime neincalzita (30 mm)
- P:** Putere (**max. 10 W/cm²**)
- U:** Tensiune de alimentare
(**max. 250 V**)
- B:** Pin filetat M3/M4 (**B1**)
Conector plat 4,8/6,3 mm (**B2**)
Conductor sertizat la exterior (**B3**)
Conductor continuu (**B4**)
Conector ceramic (**B5**)

Order specifications:

- n:** Quantity
No.: **S5156**, □ (square)
- A:** Cross-section tubular heater
(□6 / □8 mm)
- L:** Length tubular heater
(**max. 2600 mm**)
- LU1:** Unheated length (30 mm)
LU2: Unheated length (30 mm)
- P:** Power (**max. 10 W/cm²**)
- U:** Connection voltage
(**max. 250 V**)
- B:** Thread pin M3/M4 (**B1**)
Flat plug 4,8/6,3 mm (**B2**)
Lead crimped on the outside (**B3**)
Continuous lead (**B4**)
Ceramic connector (**B5**)

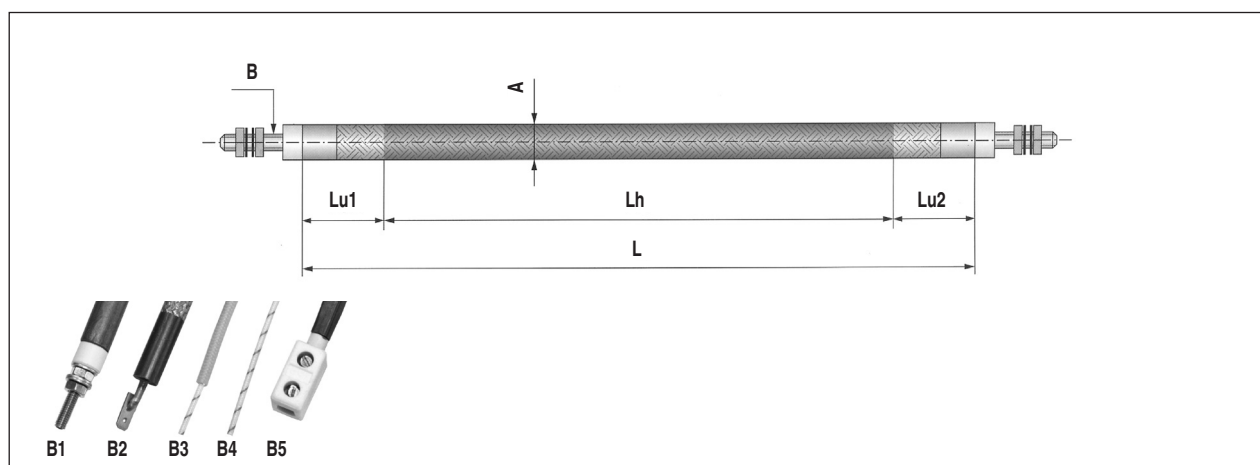

n	Nr. / No.	A □ [mm]	L [mm]	P [W]	U [V]	B
	S5156 /	X	X	X	X	X
	S5156 /	X	X	X	X	X
	S5156 /	X	X	X	X	X
	S5156 /	X	X	X	X	X
	S5156 /	X	X	X	X	X