

Reglatoare de temperatura

INFO

S5230/ ... (WTD-35/M)

Circuite: 2 - 12 (Standard)

► Mai multe zone disponibile la cererea clientului

Termocupluri: Fe-CuNi, Ni-CrNi, PT100

- Afisaj dublu cu 4 cifre pentru setarea valorii reale
- Functionare Soft-Start
- Comutare manuala/automata
- Auto-optimizare inteligenta
- Contactor pentru semnal de alarma, operat de releu
- Selectabil 2 puncte de referinta (Stand-By)
- Blocare tastatura
- Indicator pentru arderea sigurantei

Optiuni:

- Interfata de comunicare seriala RS 485
- Afisaj pentru curentul rezistentei cu monitorizarea avariilor
- Sistem de control pe 3 nivele (Incalzire - Off - Racire)
- Carcasa metalica

Temperature Control Units

INFO

Control circuit: 2 - 12 (Standard)

► More circuits available on request

Thermocouples: Fe-CuNi, Ni-CrNi, PT100

- Two 4-digits displays for set- and actual values
- Soft-start-function
- Manual / automatic switchable
- Smart selfoptimisation
- Relay-operated contactor alarm signal
- Two set-points selectable (Stand-by)
- Keyboard interlocking
- Fuseblown indicator

Options:

- Serial communication interface RS 485
- Heater current display with fault monitoring
- 3-Level-controlling system (Heating - Off - Cooling)
- Metal case

Nr. / No.
S5230/ ...



Nr. / No.		S5230/ ...
Tensiune Voltage	V-AC	230 / 400 (3P+N+PE)
Frecventa Frequency	Hz	50 - 60
Puterea Wattage	W	3.300 / Zona / Zone

Reglatoare de temperatura

Temperature Control Unit

S5230/ 2 (WTD-35/M)


Regulator pentru pana la 2 zone de control
Conector rezistenta: Conector multipin cu 16-pini

Control unit for up to 2 control zones
Heater connection: 16-pole multiple plug

Dimensiuni:
255 x 145 x 363 mm (L x l x A)

Dimension:
255 x 145 x 363 mm (W x H x D)

Nr. / No.
S5230/ 2

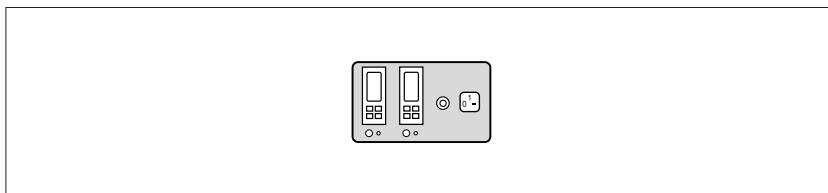

S5230/ 3 (WTD-35/M)


Regulator pentru pana la 3 zone de control
Conector rezistenta: Conector multipin cu 16-pini

Control unit for up to 3 control zones
Heater connection: 16-pole multiple plug

Dimensiuni:
255 x 145 x 363 mm (L x l x A)

Dimension:
255 x 145 x 363 mm (W x H x D)

Nr. / No.
S5230/ 3

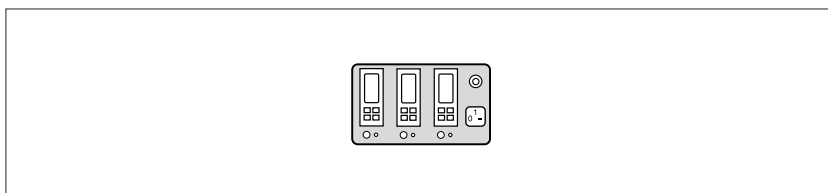

S5230/ 4-6 (WTD-35/M)


Regulator pentru pana la 4-6 zone de control
Conector rezistenta: Conector multipin cu 24-pini

Control unit for up to 4-6 control zones
Heater connection: 24-pole multiple plug

Dimensiuni pentru 4 zone de control:
350 x 145 x 363 mm (L x l x A)
Dimensiuni pentru 6 zone de control:
470 x 145 x 413 mm (L x l x A)

Dimension 4 control zones:
350 x 145 x 363 mm (W x H x D)
Dimension 6 control zones:
470 x 145 x 413 mm (W x H x D)

Nr. / No.
S5230/ 4-6

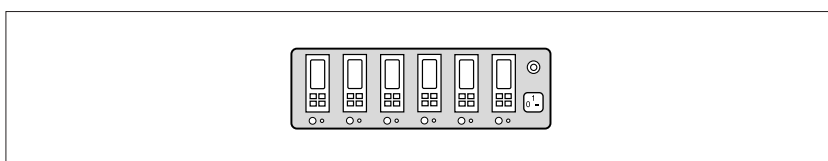

S5230/ 7-12 (WTD-35/M)

Regulator pentru pana la 7-12 zone de control
Conector rezistenta: 2 x Conector multipin cu 24-pini

Control unit for up to 7-12 control zones
Heater connection: 2 x 24-pole multiple plug

Dimensiuni:
470 x 280 x 413 mm (L x l x A)

Dimension:
470 x 280 x 413 mm (W x H x D)

Nr. / No.
S5230/ 7-12

