

Elemente de blocare, montare laterala

Locking Unit, Side Mounting

S1150/ ... (SLM ...)

PARTEA 1

- Material: 1.2344
- Duritate miez: 40 - 44 HRc
- Duritate suprafata: 65 HRc
- Strat: Melonit, nitrurat

PART 1

- Material: 1.2344
- Core hardness: 40 - 44 HRc
- Surface hardness: 65 HRc
- Coating: Melonite, nitrated

PARTEA 2


- Material: 1.2363
- Duritate miez: 58 - 60 HRc
- Duritate suprafata: 80 HRc
- Strat: Nitrura de titan

PART 2

- Material: 1.2363
- Core hardness: 58 - 60 HRc
- Surface hardness: 80 HRc
- Coating: Titanium nitride

Sunt incluse 4 suruburi (SHC) la livrare

4 socket head cap screws (SHC) are included

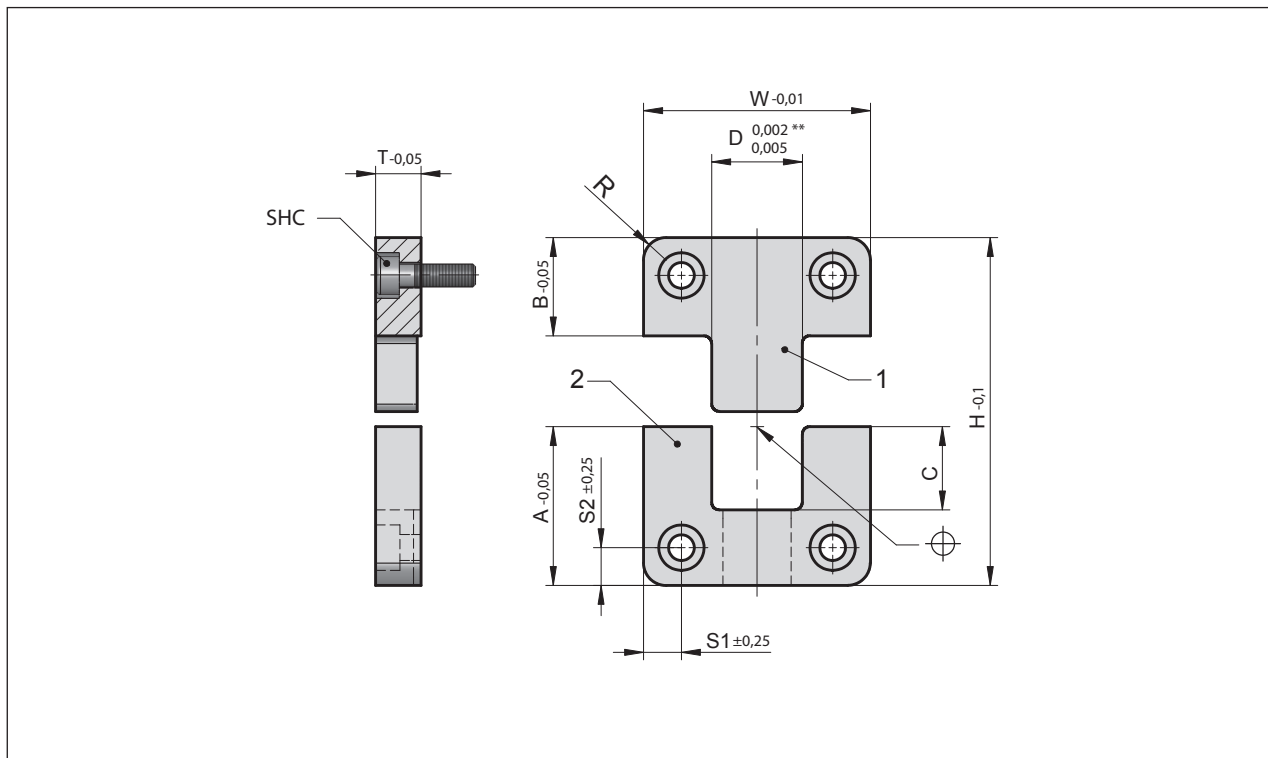

T	W	A	B	C	D	H	R*	S1	S2	SHC	Nr. / No.
16	50	21,5	21,5	12	17	43	5	8	11	M6x18	S1150/ 16x50
19	75	36	36	17	25	72	5	12,5	18	M10x20	S1150/ 19x75
19	100	45	45	23	35	90	5	15	22	M10x20	S1150/ 19x100
25	125	45	45	23	35	90	5	20,5	22	M10x25	S1150/ 25x125

* = Raza locatie

** = Decalaj pe o parte

* = Pocket radius

** = Clearance per side