

Filtru de mixare pentru masini de injectie


INFO

S4601/ . . . (MF 200)

Mat.: 1.2343

Machine Mixing Screen

INFO

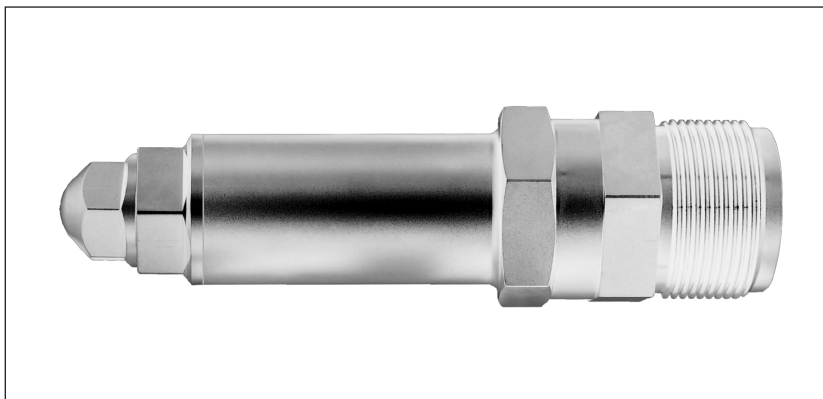

Avantaje:

- Filtru eficient, cu efect de amestecare foarte mare
- Eficienta mare de amestecare reduce cota granulelor de coloranti de pana la 40%.
- Pierderile de presiune sunt foarte mici
- Pot fi livrate cu filtre cu gauri foarte mici
- Deasemenea adecvat pentru imersie

Advantages:

- An effective filter with very high mixing effect
- The highly effective mixing reduces the share of colour granule up to 40%
- Very low pressure loss
- Can be delivered with very tiny filter gap
- Also suitable for immersion

Specificatii tehnice:

Technical specifications:

Nr. / No.		S4601/ . . .			
Dimesiunea gaurilor Gap size	S	0,3	0,4	0,5	0,65
Diametrul gaurii la cavitate Gating diameter cavity	mm	0,7 - 1,8	1 - 2,2	1,4 - 3	1,8 - 4
Pierdere de presiune, aprox. Pressure loss, approx.	%	6	5	4	3
Flux total la deschidere Total flow opening	mm ²	220	290	360	470
Greutatea de injectie, max. Shot weight, max.	g	600	800	1100	1500

**Filtru de mixare
pentru masini de injectie**

LA CEREREA CLIENTULUI

**Machine Mixing
Screen**

CUSTOM MADE

Formular comanda		Order form
Firma/Company _____		
Persoana contact/Contact _____		
Tel.: _____	Fax: _____	Data/Date: _____
<input type="checkbox"/> Comanda/Order	Nr./No.: _____	<input type="checkbox"/> Cerere oferta/Quotation

Specificatii comanda:

n: Cantitatea
Nr.: **S4601**

S: Dimensiunea gaurilor
(0,3 / 0,4 / 0,5 / 0,65 mm)

D2: **(2,5 - 6 mm)**

N: fara tratament de suprafata (0)
nitrat (1)


Order specifications:

n: Quantity
Nr.: **S4601**

S: Gap size
(0,3 / 0,4 / 0,5 / 0,65 mm)

D2: **(2,5 - 6 mm)**

N: without surface treatment (0)
nitrided (1)

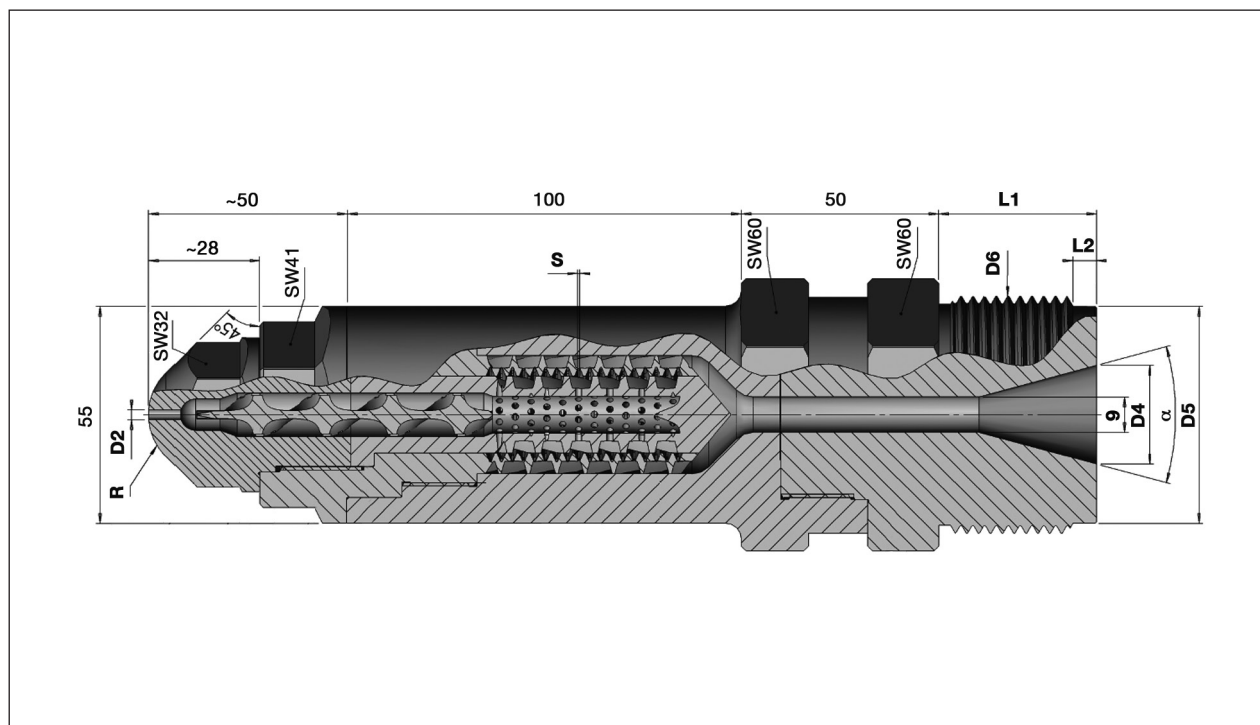

n	Nr. / No.	S [mm]	D2 [mm]	D4 [mm]	D5 [mm]	D6 [mm]	L1 [mm]	L2 [mm]	α [°]	R [mm]	N [mm]
	S4601 /	X	X	X	X	X	X	X	X	X	X
	S4601 /	X	X	X	X	X	X	X	X	X	X
	S4601 /	X	X	X	X	X	X	X	X	X	X
	S4601 /	X	X	X	X	X	X	X	X	X	X
	S4601 /	X	X	X	X	X	X	X	X	X	X